

JBC

www.jbctools.com

INSTRUCTION MANUAL



DI

1-Tool Control Unit

This manual corresponds to the following references:

DI-9D (100V)

DI-1D (120V)

DI-2D (230V)

Packing List

The following items are included:



DI Control Unit 1 unit

Power Cord 1 unit

Ref. 0024092 (100V)

0023715 (120V)

0023714 (230V)

Manual 1 unit

Ref. 0027025


Features

For a basic working system, 1 control unit + 1 stand + 1 tool and 1 cartridge are needed.



Screen

Menu Buttons

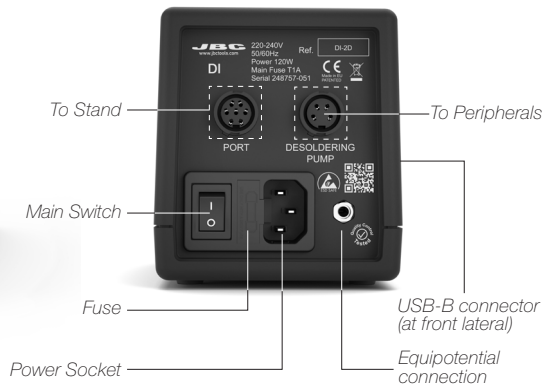

To Stand

To Peripherals

Main Switch

Fuse


Power Socket

USB-B connector
(at front lateral)

Equipotential
connection

Connection Example - General Purpose Handle


DI 1-Tool Control Unit

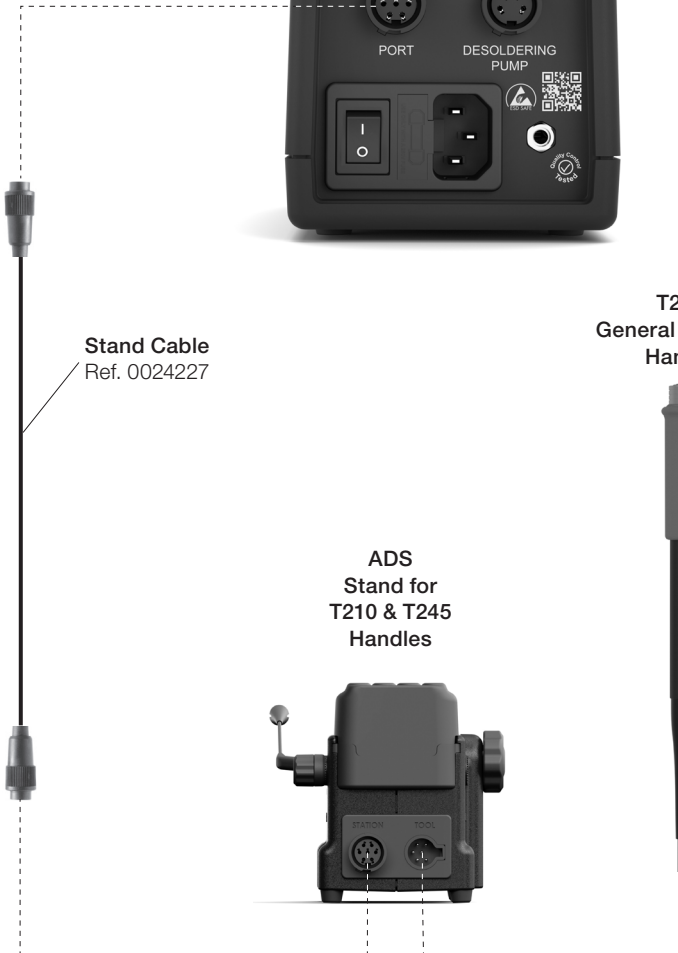

Stand Cable
Ref. 0024227

T245
General Purpose
Handle

ADS
Stand for
T210 & T245
Handles

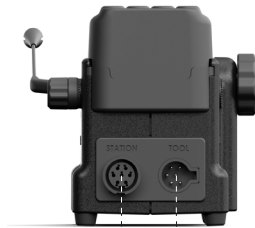

Connection Example - Desoldering Iron

DI 1-Tool Control Unit



Stand Cable
Ref. 0024227



DR560
Desoldering Iron



DRS
Stand for
DR560
Desoldering
Iron



Module Cable
Ref. 0026830



MS
Electric Desoldering
Module for DI & CS



Suction Filter Ref. 0821830

Compatibility

Select the equipment that best suit your soldering or desoldering needs.


Modular System				Peripherals		
Control Unit	Stand	Tool	Cartridge Range	MS / MV	MN	P405
DI	ADS	T210	C210			
		T245	C245			
		T470				
	DNS	T210N	C210		●	●
		T245N	C245		●	●
	APS	AP250	C250			
	AMS	AM120	C120			
		PA120				
	ATS	AT420	C420			
	HTS	HT420				
	DSS	DS360	C360	●		●
	DRS	DR560	C560	●		●

Operation

The JBC Most Efficient Soldering System


Our revolutionary technology is able to recover tip temperature extremely quickly. It means the user can work at a lower temperature and improve the soldering quality. The tip temperature is further reduced thanks to the Sleep and Hibernation modes which increase up to 5 times the life of the tip.

1. Work




When the tool is lifted from the stand the tip will heat up to the selected temperature.

2. Sleep





When the tool is in the stand, the temperature falls to the preset Sleep temperature.


3. Hibernation





After longer periods of inactivity, the power is cut off and the tool cools down to room temperature.



- Change temperature (from 90 to 450°C)
- Select temperature levels
- Fix one temperature




- Change Sleep temperature
- Set Sleep delay (from 0 to 9 min or no Sleep)



- Change Hibernation delay (from 0 to 60 min or no hibernation)


Control Process

Work Screen

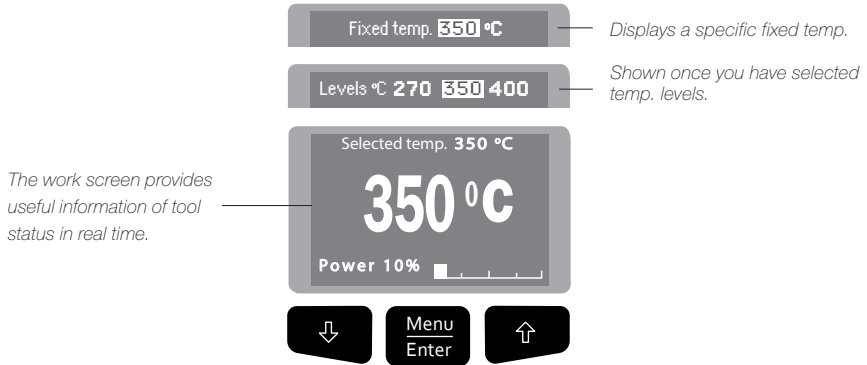

Menu Screen

Original PIN: 0105

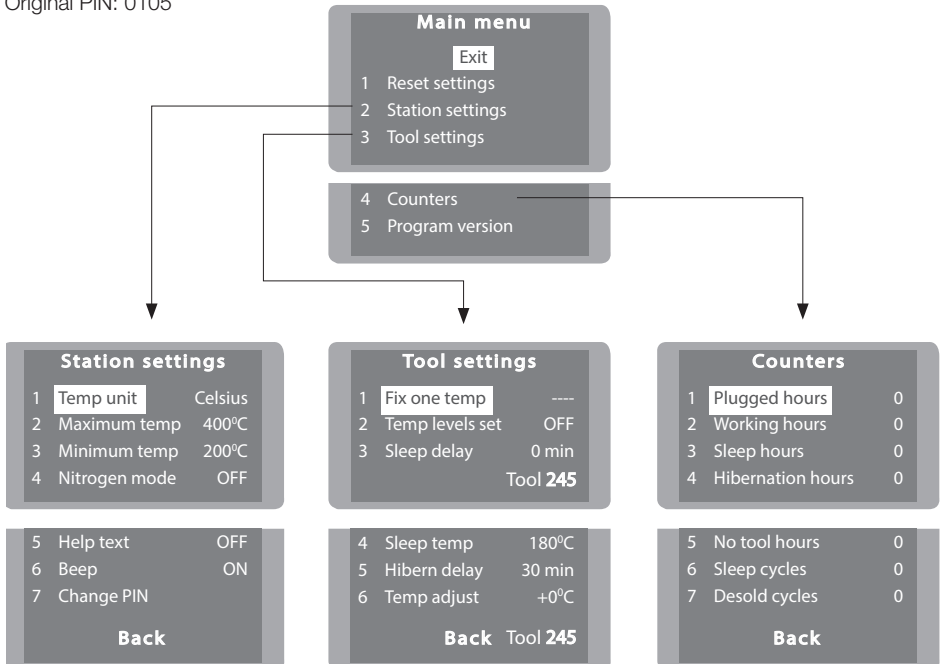


USB Connector

Download the latest software from our website to improve your soldering station.

JBC Updater

www.jbctools.com/software.html

Update the station software via USB connection:

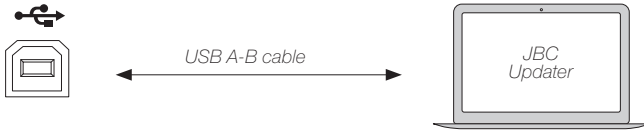

Maintenance


Before carrying out maintenance, always switch the device off and disconnect it from the mains. Allow the equipment to cool down.

- Clean the station display with a glass cleaner or a damp cloth.
- Use a damp cloth to clean the casing and the tool. Alcohol can only be used to clean the metal parts.
- Periodically check that the metal parts of the tool and the tool holder are clean so that the station can detect the tool's status.
- Maintain the tip surface clean and tinned before storage to avoid tip oxidation. Rusty and dirty surfaces reduce heat transfer to the solder joint.
- Periodically check all cables.
- Replace any defective or damaged pieces. Only use original JBC spare parts.
- Repairs should only be performed by a JBC authorized technical service.

clean periodically



- **EARTH FUSE** When this warning appears on the main display, earthing fuse must be replaced.
- Replace a blown fuse as follows (applies to both the earthing fuse and the main fuse):
 1. Pull off the fuse holder and remove the fuse. If necessary, use a tool to lever it off.
 2. Insert the new fuse into the fuse holder and return it to the station.

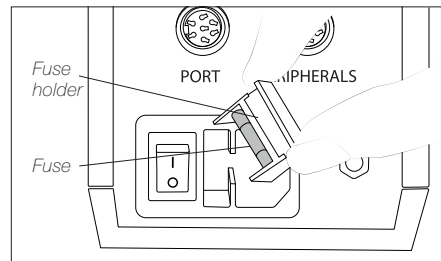

Safety



It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosion.

- Do not use the units for any purpose other than soldering or rework. Incorrect use may cause a fire.
- The power cord must be plugged into approved bases. Be sure that it is properly grounded before use. When unplugging it, hold the plug, not the wire.
- Do not work on electrically live parts.
- The tool should be placed in the stand when not in use in order to activate the sleep mode. The soldering tip or nozzle, the metal part of the tool and the stand may still be hot even when the station is turned off. Handle with care, including when adjusting the stand position.
- Do not leave the appliance unattended when it is on.
- Do not cover the ventilation grills. Heat can cause inflammable products to ignite.
- Avoid flux coming into contact with skin or eyes to prevent irritation.
- Be careful with the fumes produced when soldering.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid personal harm.
- Utmost care must be taken with liquid tin waste which can cause burns.
- This appliance can be used by children over the age of eight and also people with reduced physical, sensory or mental capabilities or lack of experience provided that they have been given adequate supervision or instruction concerning the use of the appliance and understand the hazards involved. Children must not play with the appliance.
- Maintenance must not be carried out by children unless supervised.

Specifications

DI

1-Tool Control Unit

DI-1D 120V 50/60Hz. Input fuse: T2A. Output: 23.5V.

DI-2D 230V 50/60Hz. Input fuse: T1A. Output: 23.5V.

DI-9D 100V 50/60Hz. Input fuse: T2.5A. Output: 23.5V.

- Output Peak Power CD-BE: 130W
- Temperature Range: 90 - 450 °C / 190 - 840 °F (±5%)
- Idle Temp. Stability (still air): ±1.5 °C / ±3 °F
- Tip to Ground Voltage/Resistance: Meets and exceed
ANSI/ESD S20.20-2014 IPC J-STD-001F
- Ambient Operating Temp: 10 - 40 °C / 50 - 104 °F
- Connections: USB-B / Peripherals connectors

- Control Unit Dimensions / Weight: 180 x 94 x 106 mm / 2.250 kg
(L x W x H) 7.10 x 3.70 x 4.17 in / 4.96 lb

- Total Package Dimensions / Weight: 220 x 213 x 160 mm / 2.5 kg
(L x W x H) 8.66 x 8.39 x 6.30 in / 5.56 lb

Complies with CE standards.
ESD safe.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.

Get 1 extra year JBC warranty by registering here:
<https://www.jbctools.com/productregistration/>
within 30 days of purchase.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.

CE EAC UK
CA

www.jbctools.com

0027025-241123