



Model 8830



Model 8831



Model 8832

8830/8831/8832/8833 compact Infrared Thermometers provide fast, easy, and accurate readings for most surface temperature measurements with Type K Input and 20 Points Memory

- IR Thermometer with Type K Input and 20 Points Memory
- Widest temperature range from -50.0 to 800°C (-58.0 to 1472°F)
- Unique flat surface, modern housing design
- Built-in laser pointer
- Type K temperature measurements
- Automatic capture emissivity for targeting
- Automatic Data Hold
- Max, Min, DIF, AVG record
- High and low alarm
- Adjustable emissivity



● 13 : 1 distance to spot size

- IR Thermometer with Type K Input and 20 Points Memory
- Automatic capture emissivity for targeting

Features	8830	8831	8832	8833
User selectable °C or °F	*	*	*	*
Laser targeting	*	*	*	*
Automatic Data Hold	*	*	*	*
Auto Power Off	*	*	*	*
White Backlit LCD Display	*	*	*	*
Overrange indication	*	*	*	*
Trigger lock	*	*	*	*
Max, Min, DIF, AVG record	*	*	*	*
High and low alarm	*	*	*	*
Adjustable emissivity	*	*	*	*
Type K temperature measurements	*	*	*	*
Max. Temperature	380°C/716°F	480°C/896°F	580°C/1076°F	800°C/1472°F
Optical Resolution	13:1			

Specifications	8830	8831	8832	8833
IR Temp. Range	-32°C to 380°C -25.6°F to 716°F	-32°C to 480°C -25.6°F to 896°F	-32°C to 580°C -25.6°F to 1076°F	-50°C to 800°C -58°F to 1472°F
Optical Resolution	13:1			
IR Temp. Resolution	0.1°C/°F			
Type K Temp. Range	-50°C to 1370°C/-58°F to 2498°F			
Type K Temp. Resolution	0.1° up to 2000°, 1° over 2000°			
Response Time	Less than 1 second			
Basic Accuracy	±1.5% of reading			
Emissivity	Adjustable 0.10~1.0			

Size(HxWxD): 180mm x 106mm x 48mm
Weight: 250g



EMC
EN: 61326
EN: 60825-1



Temperature probe
(Optional: NR-31B / TP-500 / TCP-100)



Thermistor clamp




TCP-100

Applications

- Plant/General Maintenance
- HVAC/R
- Transportation/Automotive
- Cooling and Reheating
- Serving areas
- Food service Equipment
- Cold storage

Distance (D) to Spot size(S)
D:S=13:1 (Unit: mm)

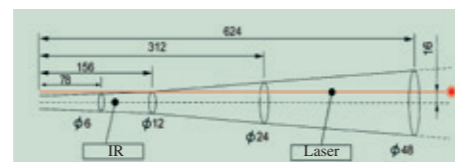

Accessories:
9V battery, Carrying case, clamshell and type K temperature probe

- IR Thermometer with Type K Input and 20 Points Memory
- Automatic capture emissivity for targeting

Worldwide Patent:
PCT/CN2012/082197



● 30 : 1 distance to spot size

8833H/8835/8835TS compact Infrared Thermometers provide fast, easy, and accurate readings for most surface temperature measurements with Type K Input and 20 Points Memory

- IR Thermometer with Type K Input and 20 Points Memory
- High 30:1 distance to target ratio measures smaller surface areas at greater distances
- Widest temperature range from -50.0 to 1050°C (-58.0 to 1922°F)
- Unique flat surface, modern housing design
- Built-in laser pointer
- Type K temperature measurement
- Automatic capture emissivity for targeting
- Automatic Data Hold
- Max, Min DIF, AVG record
- High and low alarm
- Adjustable emissivity



EMC
EN: 61326
EN: 60825-1



Model 8833H/8835

Features	8833H	8835/8835TS
User selectable °C or °F	*	*
Laser targeting	*	*
Automatic Data Hold	*	*
Auto Power Off	*	*
White Backlit LCD Display	*	*
Overrange indication	*	*
Trigger lock	*	*
Max, Min, DIF, AVG record	*	*
High and low alarm	*	*
Adjustable emissivity	*	*
Type K temperature measurements	*	*
High Temperature	850°C/1562°F	1050°C/1922°F
Optical Resolution	30:1	30:1
Green, Red & Blue backlight: Normal, Higher & Lower temperature indications (8835TS)		
T-Sound: Changeable beeper indication by Temperature (8835TS)		

Specifications	8833H	8835/8835TS
IR Temp. Range	-50°C to 850°C/ -58°F to 1562°F	-50°C to 1050°C/ -58°F to 1922°F
Optical Resolution	30:1	
IR Temp. Resolution	0.1°C/°F	
Type K Temp. Range	-50°C to 1370°C/-58°F to 2498°F	
Type K Temp. Resolution	0.1° up to 2000°, 1° over 2000°	
Response Time	Less than 1 second	
Basic Accuracy	±1.5% of reading	
Emissivity	Adjustable 0.10~1.0	

Size(HxWxD): 180mm x 106mm x 48mm
Weight: 250g



Temperature probe
(Optional:NR-31B / TP-500 / TCP-100)



Thermistor clamp



TCP-100

Accessories:
9V battery, Carrying case, clamshell and type K temperature probe



Model 8835TS



Distance (D) to Spot size(S)
D:S=30:1 (Unit: mm)

